


NETAFIM USA

Check Valves

Durable and Dependable Check Valves

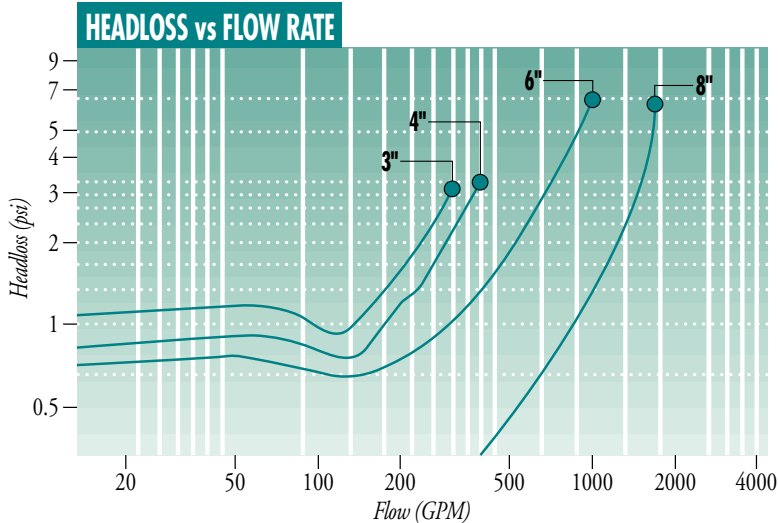

Product Advantages

- Made of engineered plastic materials.
- Operates under highly corrosive conditions.
- Spring loaded.
- Simple and easy to install - can be installed in any position.
- Minimum head loss - as the flap rises, its arm shortens resulting in a reduced movement and head loss reduction.
- Wafer type construction allows the Check Valve to be mounted between flanges.
- Multiple sizes to fit system requirements.
- 5 year warranty.

DIMENSIONS & WEIGHT

Size	Part Number	Height	Depth	Weight
3"	65ARIN3	8.2"	3.0"	3.0 lbs
4"	65ARIN4	8.6"	3.3"	3.5 lbs
6"	65ARIN6	13.0"	4.2"	7.0 lbs
8"	65ARIN8	13.9"	5.0"	14.0 lbs



Optional

Check Valve with Electric Indicator Limit Switch.

Available in all sizes.



3" Check Valve

8" Check Valve

Applications

- For hot water and heating systems.
- For all types of irrigation systems and application of fertilizers through the irrigation system.

Specifications

- Available in 3", 4", 6" and 8" sizes
- Working pressure: 3 to 230 psi
- Mounts between flanges

Materials

3", 4" and 6" Check Valve

Body:	Nylon
Flap:	Nylon
Flap Seal:	EPDM Rubber
Spring:	Stainless Steel
O-Ring:	EPDM Rubber

8" Check Valve

Body:	Anodized Aluminum
Flap:	Aluminum
Flap Seal:	EPDM Rubber
Spring:	Stainless Steel
O-Ring:	BUNA-N



5470 E. Home Ave. • Fresno, CA 93727
 (888) 638-2346 • FAX (800) 695-4753
www.netafimusa.com

